


Instruction for Vector Optics Maverick 1x22 Red Dot Scope

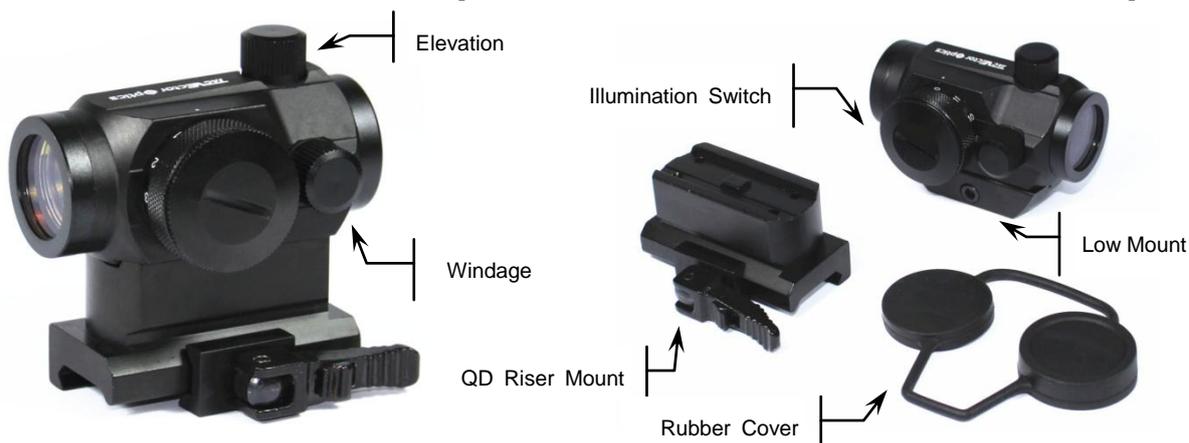

WARNING: NEVER LOOK AT THE SUN THROUGH THE SCOPE. IT MAY PERMANENTLY DAMAGE YOUR EYES.

MOUNTING

The scope is installed on gun by means of a mount. If you use low weaver mount base simply loosen screw inside the weaver base, if you use high quick release mount push the middle lock button and release the level, and then place the scope over the weaver or picatinny rail on rifle. Fasten the screw to fix it firmly on the rifle.

PRECISION ADJUSTMENTS

Remove windage and elevation adjustment caps. Before adjust make sure the scope is mounted on the gun on a solid support. Windage is the horizontal (left-to-right) adjustment, usually the side turret of the scope. Elevation is the vertical (up-and-down) adjustment, usually the top turret of the scope.

The scope features 1/2 M.O.A. (1/2" at 50 yards according to the factory setting) windage and elevation adjustment. Each audible click of adjustment changes bullet strike at a shooting distance by the amount indicated.

BATTERY EXCHANGE

To exchange the CR2032 battery, just release the thin cap of illumination system. Take out the used battery, exchange with a new one and then fasten the cap.

SEALED AND WATERPROOF

The scope is with O-ring to prevent the entry of dust or moisture.

MAINTENANCE

Your red dot scope, though amazingly tough, is a precision instrument that deserves reasonable cautious care.

1. When cleaning the lenses, first blow away any dirt and dust, or use a soft lens brush. Fingerprints and lubricants can be wiped off with lens tissue, or a soft clean cotton cloth, moistened with lens cleaning fluid.
2. All moving parts of the scope are permanently lubricated. Do not try to lubricate them.
3. No maintenance is needed on the scope's outer surface, except to occasionally wipe off dirt or fingerprints with a soft cloth.
4. Use lens covers whenever convenient.



STORAGE

Avoid storing the scope in hot places, such as the passenger compartments of vehicles on hot days. The high temperatures could adversely affect the lubricants and sealants. A vehicle's trunk, a gun cabinet or a closet is preferable. Never leave the scope where direct sunlight can enter either the objective or the eyepiece lens. Damage may result from the concentration (burning glass effect) of the sun's rays.

TAC Vector Optics

www.scvector.biz www.scvector.com

