


Instructions for Vector Optics Ratchet 1x23x34 Red Dot Sight

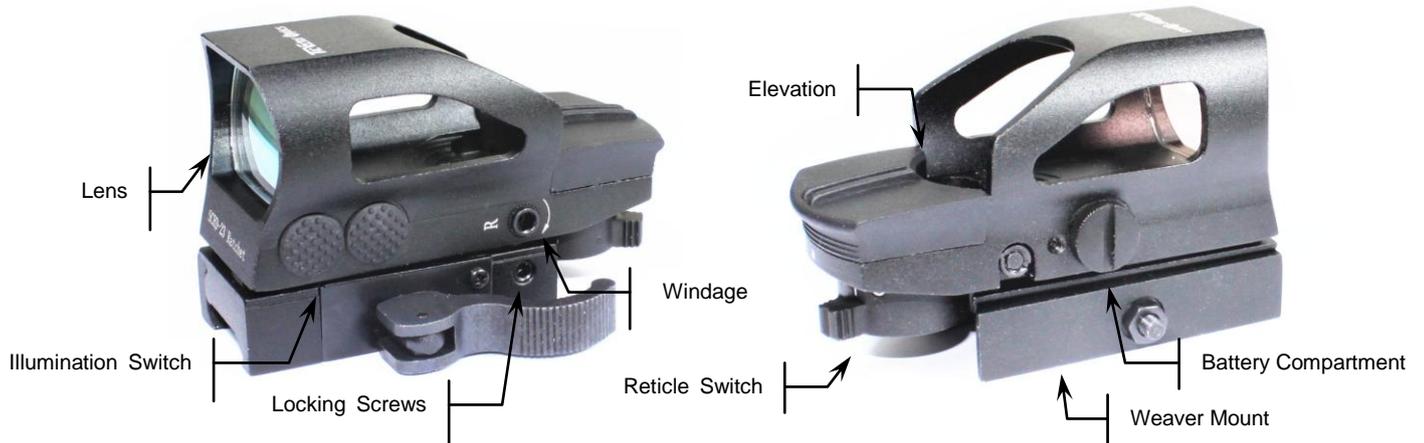

This tubeless design reflex lens aperture provides a wide field of view. It is smaller and lighter than any other sighting device, which is suitable for rapid-firing or moving targets shooting.

MOUNTING

The scope is installed on gun by means of a mount. Simply loosen the quick release mount lever and place the sight over the weaver or picatinny rail on your rifle. Switch the level to fix the sight on the gun firmly. If it is loose on the rail, first release the level, then adjust the nut a little bit on the side, at last switch the level again.

PRECISION ADJUSTMENTS

Before adjusting the precision, make sure to use the hex key to loosen the locking screw on the side of mount base. Use the bigger hex key to adjust elevation and windage. After zero the sight, fasten the locking screws to fix the reticle.

BATTERY EXCHANGE

To exchange the 3 pcs of LR754 battery, just release the cap of battery compartment. Take out the used battery, exchange with 3 pcs new.

Reticle Style and Illuminated Brightness Change

To change to different reticle just click the switch in the back of the red dot sight.

On the side of the sight, it is with two switches. The left one as picture shown controls 5 levels brightness for red. And the right is for green dot.

Press more than 3 seconds to shut down the sight.

SEALED

The scope is with O-ring to prevent the entry of dust or moisture.

MAINTENANCE

Your sight, though amazingly tough, is a precision instrument that deserves reasonable cautious care.

1. When cleaning the lenses, first blow away any dirt and dust, or use a soft lens brush. Fingerprints and lubricants can be wiped off with lens tissue, or a soft clean cotton cloth, moistened with lens cleaning fluid.
2. All moving parts of the sight are permanently lubricated. Do not try to lubricate them.
3. No maintenance is needed on the sight's outer surface, except to occasionally wipe off dirt or fingerprints with a soft cloth.

STORAGE

Avoid storing the sight in hot places, such as the passenger compartments of vehicles on hot days. The high temperatures could adversely affect the lubricants and sealants. A vehicle's trunk, a gun cabinet or a closet is preferable. Never leave the sight where direct sunlight can enter either the objective or the eyepiece lens.

Damage may result from the concentration (burning glass effect) of the sun's rays.

TACVector Optics

www.scvector.biz www.scvector.com

